

Installation and
Operating Instructions

**Add-On Module for
Built-In Loudspeakers**
1259 00

GIRA

Device description

With the add-on module for built-in loudspeakers 12 additional bell buttons can be connected to the built-in loudspeaker. Up to 11 add-on modules with 12 bell buttons each can be connected to the built-in loudspeaker. With these door communication systems with up to 70 audio devices can be realised, e.g.

- 1 Audio control device
- 1 Built-in loudspeaker with
- 5 Add-on modules
- 68 Surface-mounted, hands-free feature home stations



Number of devices


The Gira door communication system is designed for the following numbers of devices:

Audio: 70 devices,

Video: 20 devices.

The add-on module can only be used in conjunction with the built-in loudspeaker.

Device presentation

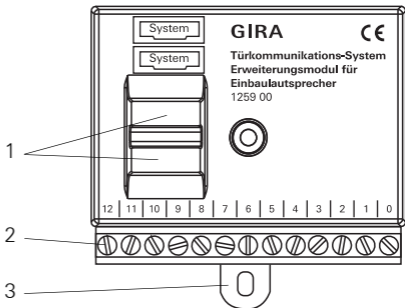

- 1 System interfaces:
Connection of the built-in loudspeaker or other system components
- 2 Terminal strip
0: Common earth for bell buttons
1 - 12: Connection for bell buttons
- 3 Mounting tab



Attention

Installation and mounting of electrical devices may only be carried out by a qualified electrician.

The add-on module can be mounted with a screw on the mounting tab or with the adhesive pad.

Adhesive mounting





Attention

When using adhesive mounting, make sure the surface is oil and grease-free.

1. Remove the protective foil from the adhesive pad.
2. Press the add-on module onto the desired mounting point for approx. 12 seconds.

Connection

1. Connect the add-on module to the built-in loudspeaker or another add-on module with the 6-pole audio connection cable.

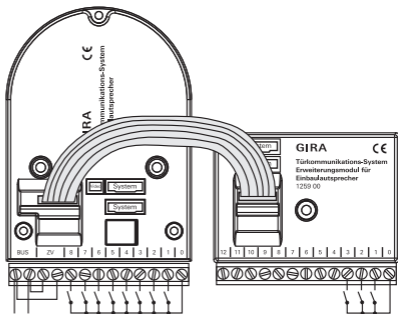

2. Connect the bell buttons. The maximum cable length is 2 m.



Do not connect "0" terminals

The "0" terminal of the add-on module may not be connected to the "0" terminal of the built-in loudspeaker or other add-on modules.

Once you have installed all of the devices (built-in loudspeaker, add-on module, home station, control device etc.), you can put the door communication system into operation. Commissioning is described in the system manual included with the control device.



Note

When commissioning large systems, please note that a maximum of 20 bell buttons can be temporarily stored per work step. If more than 20 bell buttons are installed, at first the initial 20 bell buttons must be assigned to the home stations. Then the next 20 or the remaining bell buttons are assigned.

Acceptance of guarantee

We accept the guarantee in accordance with the corresponding legal provisions.

Please return the unit postage paid to our central service department giving a brief description of the fault.

Gira
Giersiepen GmbH & Co. KG
Service Center
Dahlienstraße 12
42477 Radevormwald
Germany

Gira
Giersiepen GmbH & Co. KG
P.O. Box 1220
42461 Radevormwald
Tel +49 21 95- 602-0
Fax +49 21 95- 602-339
info@gira.de
www.gira.com

GIRA